





VOLTAGE DIVIDER INSULATORS (CAPACITIVE)

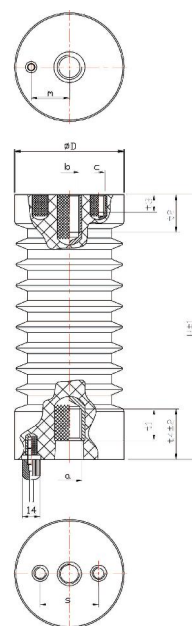

SPECIFICATIONS

Type	Um (kV)	Capacitance ±10% (pF)	Minimum Bending (N)	Minimum Creepage (mm)	Ripples	Dimensions (mm)												Weight (kg)
						H	QD	a	b	c	t1	t2	t3	t4	s	m		
10N1000	12		8000	160	5	130	80	M20	M16	M10	25	25	12	38	46	30	1.02	
15N1000	17.5		8000	240	6	175	85	M20	M16	M10	25	30	12	42	46	30	1.55	
20N1000	24		8000	320	8	210	86	M20	M16	M10	25	30	12	40	46	30	1.9	
30N500	36		4000	435	11	300	76	M16	M12	M6	30	14	12	44	36	34	1.85	
30N1000			8000	435	11	300	99	M24	M16	M10	36	30	12	54	46	32	3.35	

ACCESSORIES FOR CAPACITANCE COUPLING



Connection Diagram

