



# 2015 PRODUCT CATALOGUE


[www.plastim.com.tr](http://www.plastim.com.tr)



# ROOF FANS

Models	Unit	PFF5500	PFF6000
Air Flow Rate	m <sup>3</sup> /h	560	970
Power Supply	V/Hz	230V/110V 50-60Hz	
Dimensions	mm	364x364x107	
Power Consumption	W	58/75	85/90
Current Consumption	A	0.26/0.34	0.38/0.44
Overcurrent Protection	-	Thermal	
Electrical Connection	-	4-pole terminal 2.5mm <sup>2</sup>	
Operating Temperature	°C	-10/+70	
Protection Degree	-	IP54	
Noise Level	dB(A)	62 (64)	72 (73)
Flow Direction	-	inside/out	
Bearing	-	Ball	
Service Life	Hour	50.000	
Plastic Material	-	UL94 V0 ABS Flame Retardant	
Gasket	-	Polyurethane sealing	
Weight	kg	3.16	3.74
Mounting	-	8 pcs m4 screws	
Conformity	-	CE	

Ventilation / Roof Fans

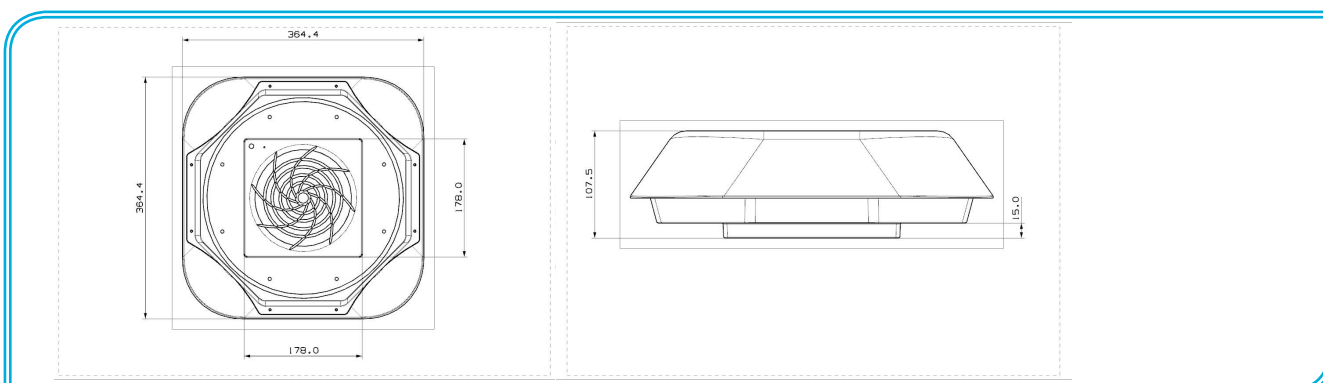



# TEMPERATURE CONTROL THERMOSTAT

Models	Unit	PTHT	PTVT
Contact Function	-	NC	NO
Temperature Setting Range	°C	0-60	0-60
Colour of Potentiometer	-	RED	BLUE
250V AC / 120V AC	A	10 (2)	15 (2)
Sensor Type	-	Bimetal	
Contact Type	-	Snap Action	
Service Life	Cycle	> 100.000	
Electrical Connections	-	2-Pole Terminal	
Plastic Material	-	UL94 V0 ABS Flame Retardant	
Protection Degree	EN60529	IP20	
Operating Temperature	°C	-25 / +80	
Storage Temperature	°C	-45 / +80	
Mounting	-	Clip for mounting on DIN rail 35mm	
Installation Position	-	Variable	
Conformity	-	CE	
Dimensions HxWxD	mm	61x34x38	
Weight	g	45	

