

보급형 제품
Distribution Product



YSAPL · YSAPBL (LED TYPE) ◀◀

指示燈系列 (Pilot Lamp)

帶燈指示按鈕開關系列 (Illuminated Push Button Switch)

龍聲電機(株) YongSung Korea

서울사무소 · Seoul Office

서울시 동대문구 황물로 87 (답십리동)

87, Hwangmul-ro (Dapsimni-dong), Dongdaemun-gu, Seoul, Korea

Tel. 02-2244-5478



Tel. 82-2-2244-5478

Fax. 02-2249-2248

Fax. 82-2-2249-2248

YS APL 指示燈 / APBL 帶燈指示按鈕開關

Type Classification Diagram 標準型號圖示

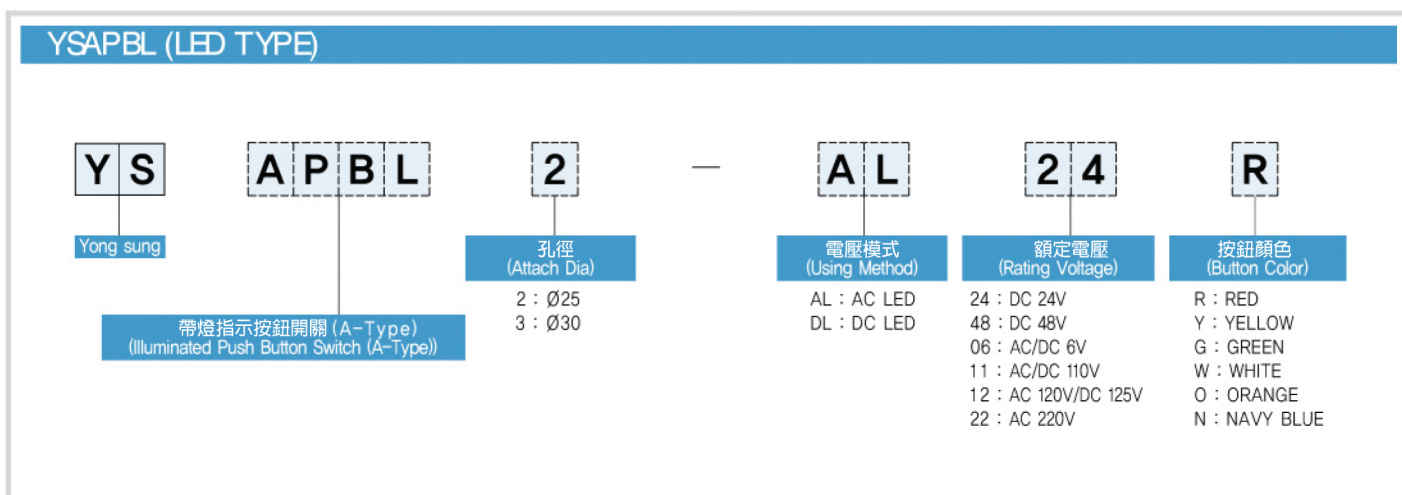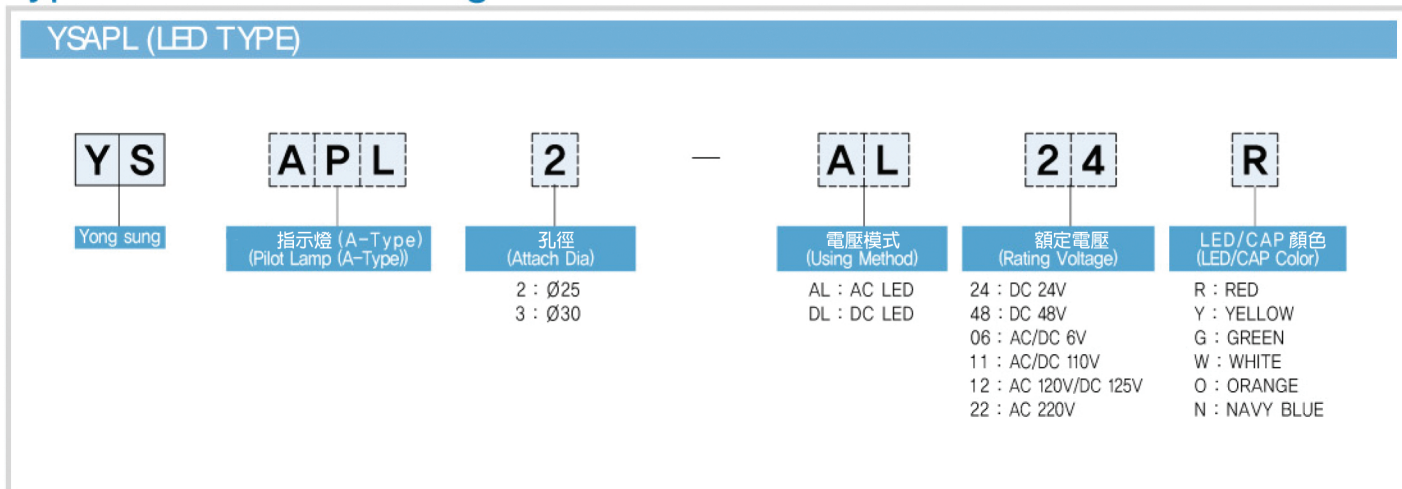

Lamp Rating LED燈泡額定規格 - YSAPL • YSAPBL

	AC (50/60Hz)	DC
額定電壓 (Rating Voltage)	6V, 110V, 120V, 220V	6V, 24V, 48V, 110V, 125V
LED燈 (LED Rating)	DC 6V (低於10mA) (Below 10mA)	
整體耗能 (Power Consumption)	6V : 0.1VA, 110V : 1.1VA, 120V : 1.2VA, 220V : 2.2VA	6V : 0.1W, 24V : 0.3W, 48V : 0.5W, 110V/125V : 1.3W

Performance Summary 總體性能 - YSAPBL

(Item)	YSAPL
絕緣組抗 (Insulation Resistance)	100MΩ (DC 500V meg)
耐受電壓 (Withstand Voltage)	AC 2500V/min (50~60Hz)
大氣溫度 (Ambient Temperature)	-25 ~ +40℃
相對濕度 (Relative Humidity)	45 ~ 85%



Performance Summary 總體性能 - YSAPBL

(Item)	YSAPBL
絕緣組抗 (Insulation Resistance)	超過100MΩ (DC 500V meg)
接點組抗 (Contact Resistance)	低於20mΩ (initial value)
耐受電壓 (Withstand Voltage)	AC 2500V/min (50~60Hz)
機械壽命 (Mechanical Life Time)	超過 500,000 (20time/min)
電氣壽命 (Electrical Life Time)	超過 100,000 (20time/min)
大氣溫度 (Ambient Temperature)	-25 ~ +40℃
相對濕度 (Relative Humidity)	45 ~ 85%

Contacting Rating 接點規格 - YSAPBL

額定絕緣電壓 (Rating Insulation Voltage)			AC 600V, DC 250V		
額定導通電流 (Rating Conductive Current)			15A		
額定電壓 (Rated Voltage)			110V(AC/DC)	220V(AC/DC)	440V(AC)
額定電流 (Ie) (Rating Current)	交流 AC	電阻負載 (AC12) (Resistive Load)	10A	6A	3A
		電感負載 (AC15) (inductive Load)	2.4A	1.2A	0.5A
	直流 DC	電阻負載 (DC12) (Resistive Load)	2.2A	1.1A	-
		電感負載 (DC13) (inductive Load)	1.1A	0.4A	-


Out-out Dimension 開孔尺寸 - YSAPL · YSAPBL

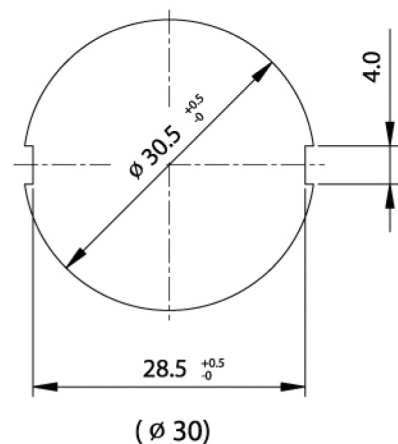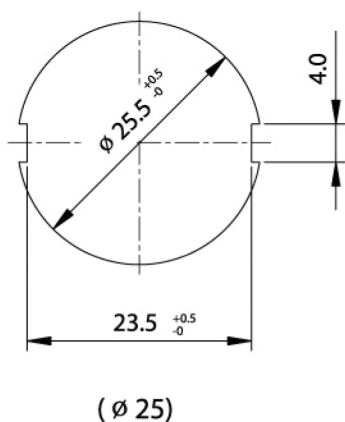


YS APL 指示燈 / APBL 帶燈指示按鈕開關

Shape Dimension 外型尺寸


YSAPL - Ø25

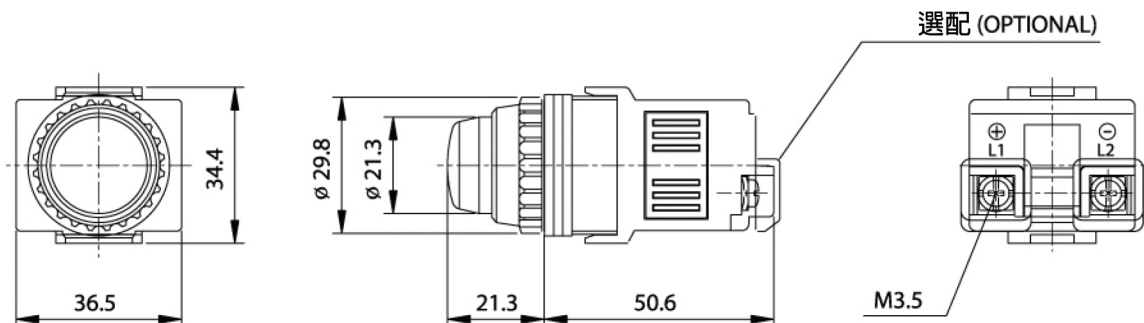

YSAPL - Ø30

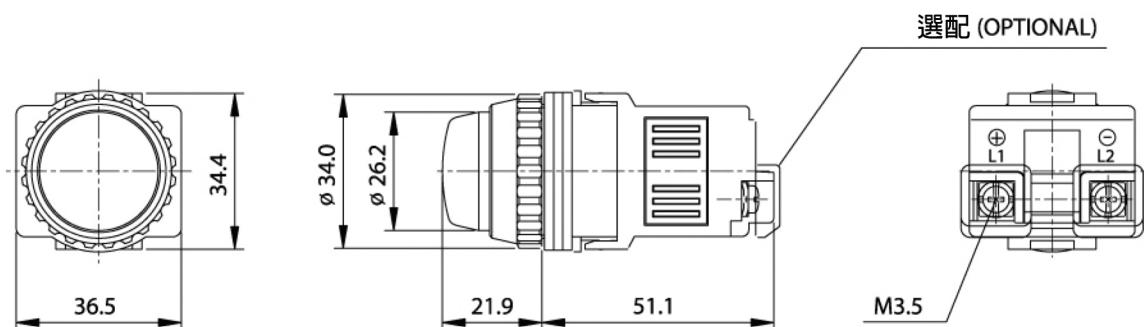

YSAPBL - Ø25

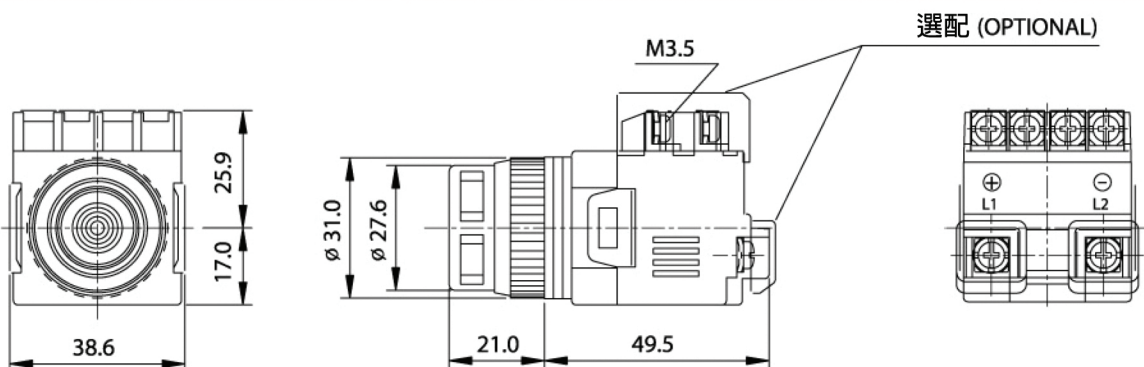

YSAPBL - Ø30

